


Stair Light Instructions

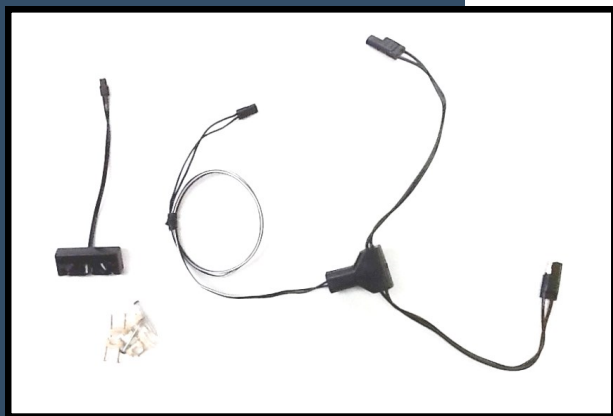

Materials Needed:

- Power Drill with 7/16" drill bit
- Phillips Head Screwdriver
- Hammer

- 1 Install the power supply with the instructions given.
- 2 Turn the system on by removing the photo eye (unplug the photo eye micro-connector from the power supply)
- 3 Locate and drill a 7/16" hole in the riser, where the light will be mounted. Connect the micro-connector to the light fixture.
- 4 Connect the power supply to the first easy plug T-cable by plugging together the black connectors.
- 5 Continue to connect all the stair lights by plugging together each T-cable.
- 6 Use the wire staples to attach the wiring to the underside of the stairs.
- 7 Reconnect the photo eye when installation is complete.

500 Principio Parkway W.
Unit 300
North East, MD 21901

(410) 287-3232

sales@ilightingLED.com
www.ilightingLED.com

*****To ensure a water tight seal, push connectors together.*****